



FRONT VIEW II SCALE 1:5

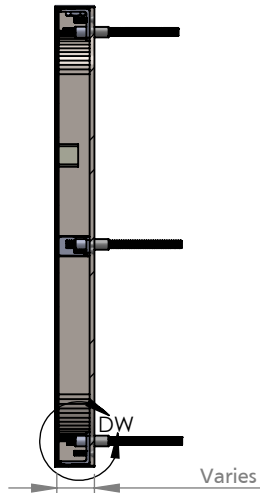

SECTION A-A II SCALE 1:5

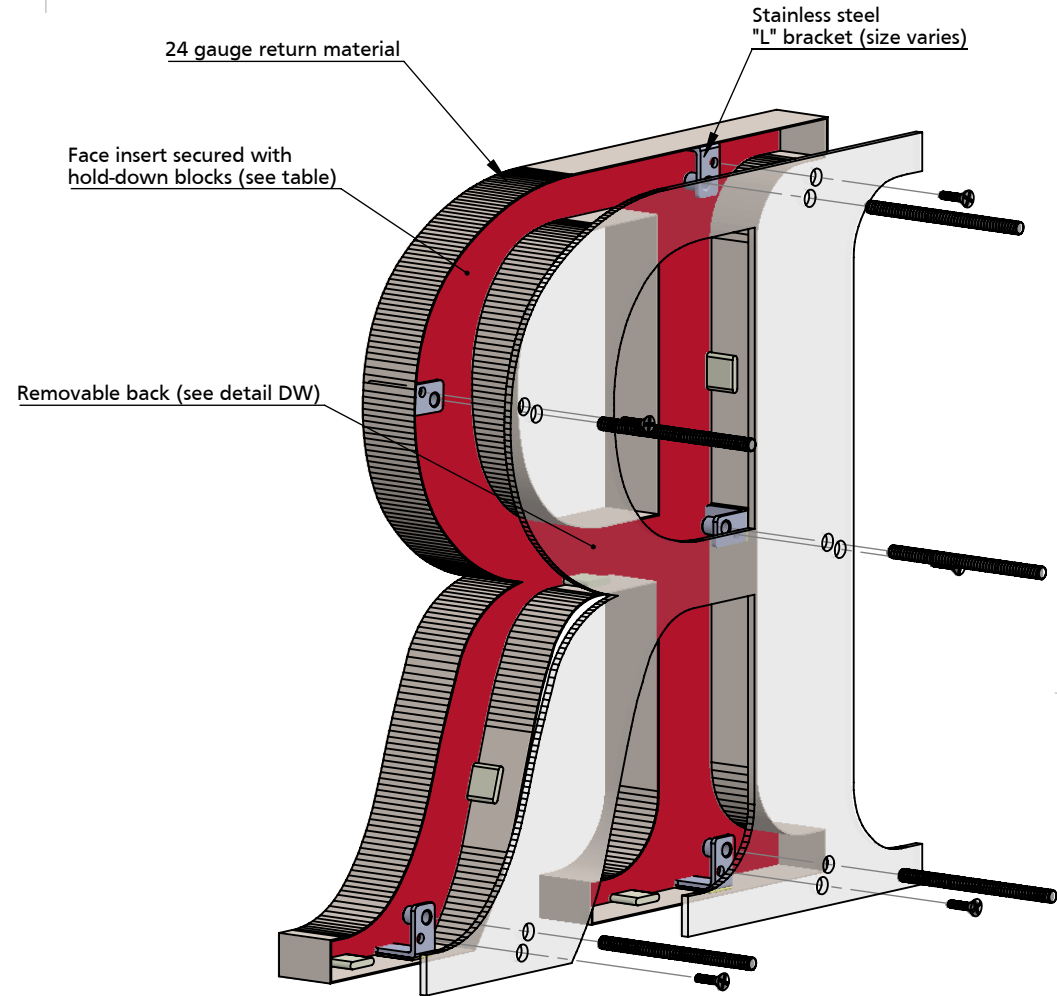

ISOMETRIC BACK VIEW II SCALE 1:3

Threaded Stud Boss
Size varies by bracket

Removable clear or light diffused Lexan or stainless steel back.

Flush back secured with stainless steel screw

Optional spacer sleeve
(Size varies)

"L" bracket secured with high resistance epoxy to return

Stainless steel Mounting Stud
Size varies (see table)

DETAIL DW II SCALE 1:1

INSERT OPTIONS	
Stainless steel	18-20 gauge up to 24" high
	16-18 gauge over 24" to 36" high
Acrylic	3/16" thick - up to 36" high

LETTER SIZE	MIN. DEPTH AND STROKE		BRACKET	STUD
up to 6"	0.6"	15 mm	Small	6 - 32
over 6" to 24"	1.0"	25.4 mm	Medium	10 - 24
over 24"	1.75"	44.5 mm	Large	1/4 - 20

MATERIAL OPTIONS

- Standard - 304 prefinished stainless steel
- Optional - 316 prefinished stainless steel (more corrosion resistant)
- 304 prefinished stainless with titanium coating



BACK OPTIONS

- Clear Lexan: 6-12" high - 0.118" thick.
- Light diffused Lexan: 0.177" thick
- Stainless steel - same gauge as face (optional: 1/8" thick metal back)

TITLE:

CUT OUT FACE WITH INSERT - BACK - SIDE MOUNT

MATERIAL:

STAINLESS STEEL

PRODUCT TYPE:

FABRICATED METAL